


General

Top layer	Thickness: 0.6mm (1/32 inch)
Dimensions	Length: 2050mm (80-3/4 inch)
	Width: 233mm (9-1/8 inch)
	Thickness: 10mm (3/8 inch)
Core	High Density Fibreboard (HDF)
Bevel	4 bevels (2x 1.5mm + 2x 0.5mm)
Gloss	Super matt (3)
Structure	Brushed
Backing	Real Wood
Density	850kg/m ³
Weight/sqm	7kg
Connection System	Unifit X
Installation type	Floating
Standard Colors	<u>Oaks</u> : Essence, Silk, Dune, Sky, Valley, Mountain Oak
	<u>Walnuts</u> : Smoked, Frozen, Stardust Walnut

Product composition

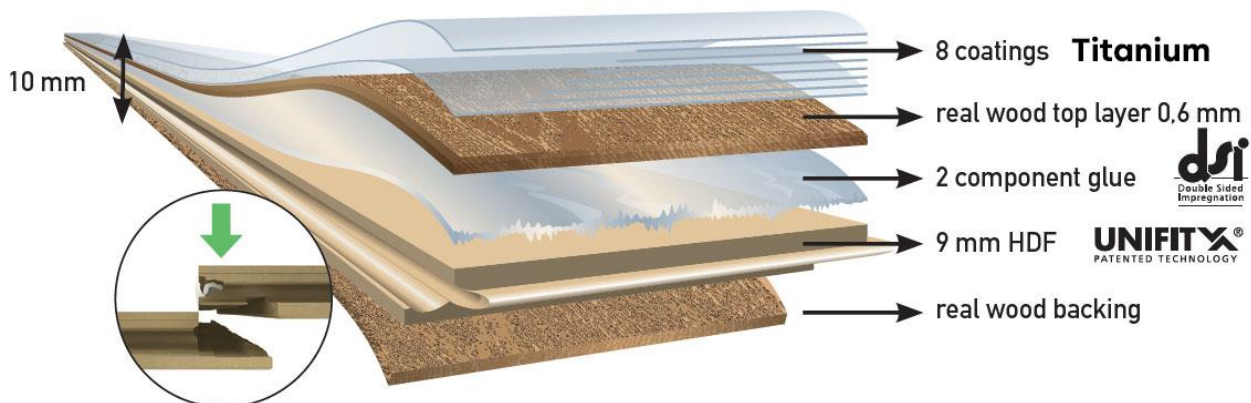

Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	33
CE Certification	EN14342:2013
Warranty	Residential limited lifetime warranty Commercial use: 10 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.073m ² K/W there is a minimal waste of energy
Thermal resistance	0,073m ² K/W
Thermal conduction	0,14W/mK
Fire reaction & smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'

Packaging

Box	5 boards Surface 2,388 m ² (25.7 sq.ft) Gross weight 19,2 kg (42 lbs)
Pallet	44 boxes Surface 105,07 m ² (1131 sq.ft) Gross weight 861 kg (1898 lbs)

